

MODEL ND-L Series Dampers

Construction-
Heavy Duty extruded aluminum.


Nylon Bearings for quiet operation.

Overlapping parallel blades for low leakage.

5/8" Diameter Drive Shaft (1.5" in Length)

10/32 Mounting Stud

Available in 8" x 6" thru 30" x 30" in even inch increments.

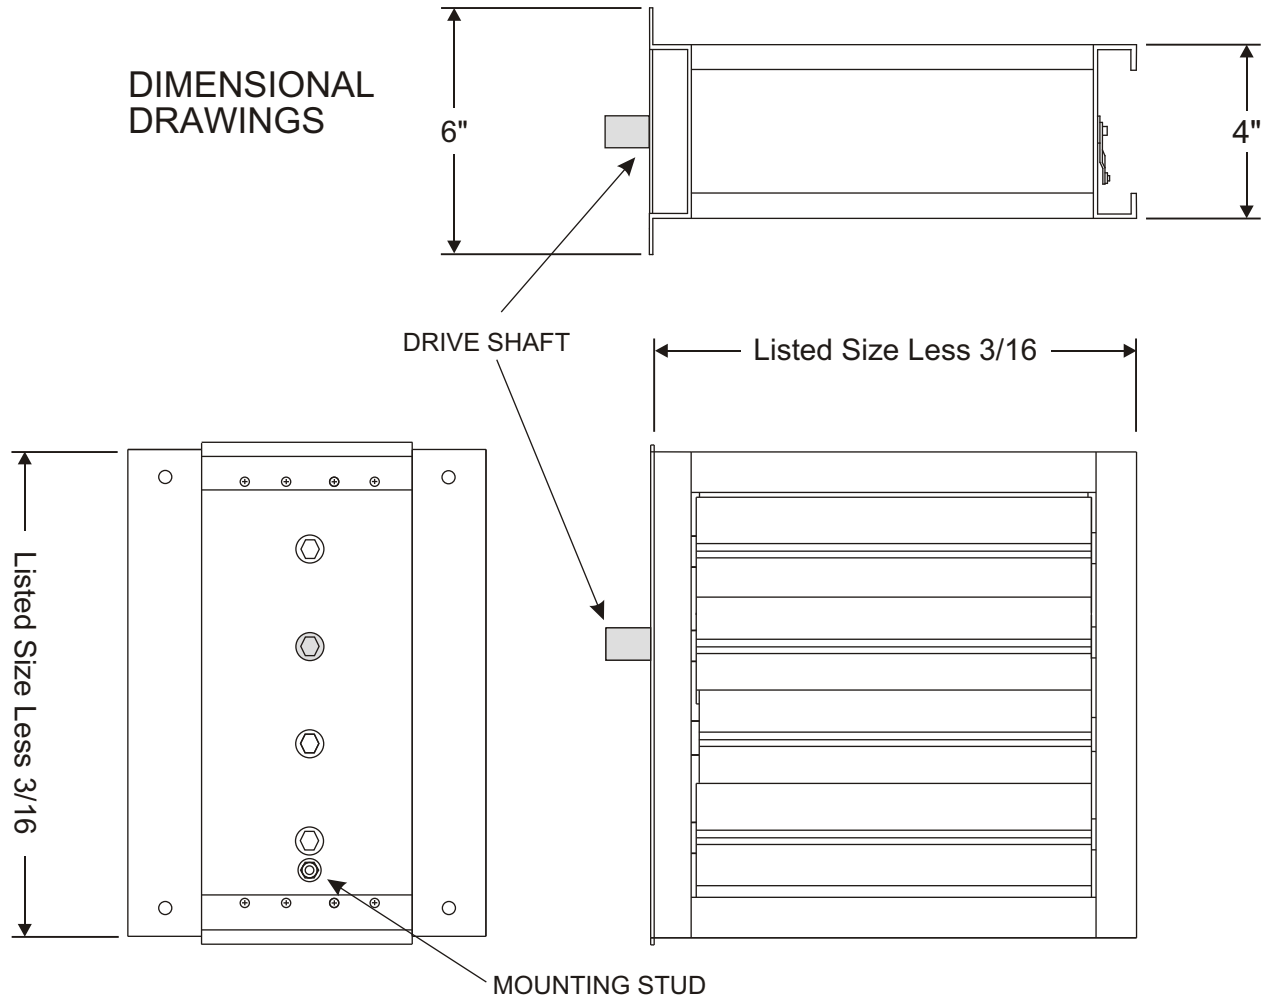

Insertion Mounting

Cut a 4" slotted opening in one side of the duct and slide the damper in. Secure the damper to the duct with the supplied sheet metal screws. Larger sizes may require additional support by securing the back of the damper as well. If using duct board, additional support can be obtained by using Model DBA Duct Board Adaptors.