

**SPECIFICATIONS**

**INPUT VOLTAGE:**

PANEL: 19-30VAC 60 Hz, *Supplied via bus cable from UZC4.*

DAMPERS: 19-30VAC 60 Hz, Transformer 40-60 VA Max. NEC Class 2.

**CURRENT DRAW:** Max 8 VA @ 24VAC.

**OVER-CURRENT PROTECTION:**

PANEL: 4.0 amp or 96 VA. *Protected via UZC4.*


DAMPERS: 2.5 amp or 60 VA.

**WIRING:** 18 gauge Solid copper wire. Do not use Stranded or Shielded Cable.

**TEMPERATURE:** -20° to 160°F (-29° to 71°C).

**HUMIDITY:** 0% - 95% RH Non-Condensing.

**DIMENSIONS:**

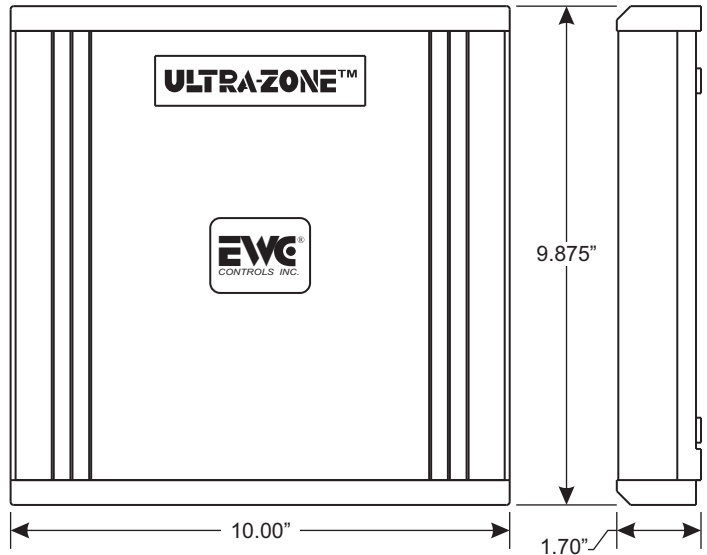

**FEATURES**

**NUMBER OF ZONES:**

Provides 2 additional zones for the Model UZC4. A total of 8 Model ZXM-2 expansion Modules can be utilized to add up to 16 additional zones.

**COMPATIBLE THERMOSTATS:**

Any Single Stage or Multi-Stage Heat/Cool or Heat Pump Thermostats.

**COMPATIBLE DAMPERS:**

EWC Models URD, ND, RSD and SID. Any 24vac 3 Wire or 2 Wire damper.

**ADDITIONAL FEATURES:**

On Board LED's indicate system operation.

**REQUIREMENTS:**

Must be used to expand a current UZC4 or higher system. Cannot be used as a Stand-alone solution or with older UZC systems (UZC-3C or UZC-2B).



385 Hwy. 33  
Englishtown, NJ 07726  
Ph: 800-446-3110  
Fx: 732-446-5362

P/N 090377A0144 REV. A

Copyright © EWC Controls 2006-2008 All Rights Reserved

**SUBMITTAL FORM**

SUBMITTED BY: \_\_\_\_\_  
 JOB: \_\_\_\_\_  
 ARCHITECT: \_\_\_\_\_  
 ENGINEER: \_\_\_\_\_  
 CONTRACTOR: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_